




MP5470–0014 Test Report

3/1/22

By: Cecilia Yuen and Cindy Yu

1. MP5470-0014 Power Tree
2. Power Requirements
3. DC Voltage Measurements (Steady State Ripple)
4. Transient Response Measurement
5. Power Sequence On/Off

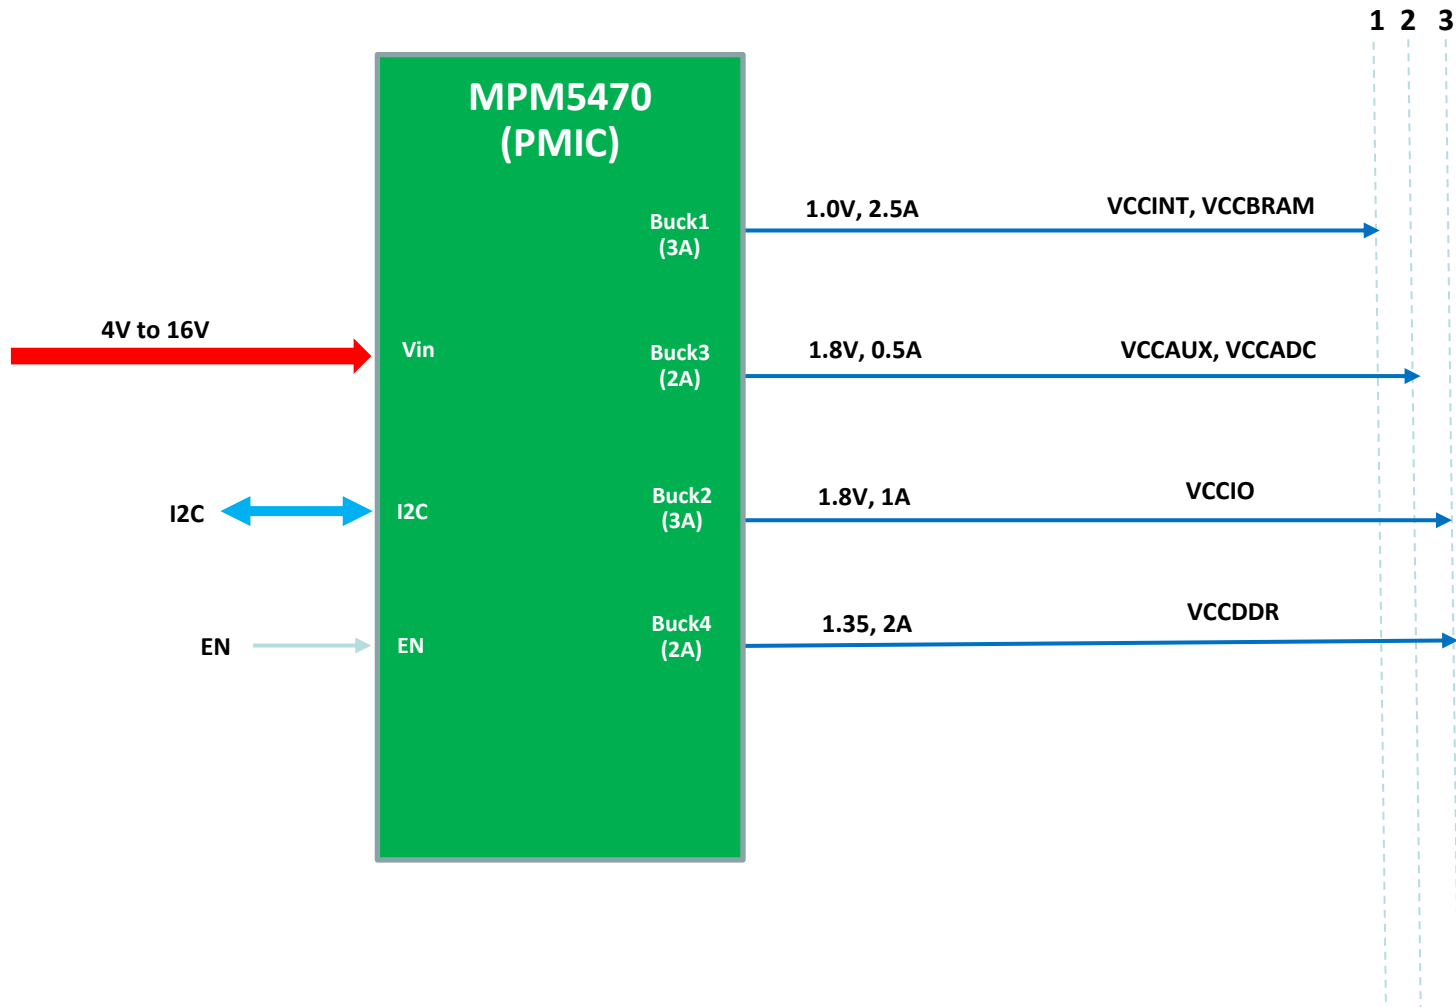



MP5470-0014 DC Output Voltage

Output	Rail Name	Power Sequence	Design Target (V)
Buck 1	VCCINT, VCCBRAM	1	1.0V
Buck 2	VCCIO	3	1.8V
Buck 3	VCCAUX, VCCADC	2	1.8V
Buck 4	VCCDDR	3	1.35V



MP5470-0014 Test specs

Rail Name	MPS Part#	Vin	VOUT	Max Current	Step load	Slew Rate
VCCINT, VCCBRAM	MP5470-0014 (Buck 1)	12V	1.0V	2.5A	1.25A→1.88A→1.25A	10A/us
VCCIO	MP5470-0014 (Buck 2)	12V	1.8V	1.0A	0.5A→0.75A→0.5A	10A/us
VCCAUX, VCCADC	MP5470-0014 (Buck 3)	12V	1.8V	0.5A	0.25A→0.375A→0.25A	10A/us
VCCDDR	MP5470-0014 (Buck 4)	12V	1.35V	2.0A	1.0A→1.50A→1.0A	10A/us



MP5470-0014 - DC Voltage Accuracy




Power Rail	Rail Name	Input Voltage	Design Target	Vout (No Load)	Vout (Half Load)	Vout (Full Load)
Buck 1	VCCINT, VCCBRAM	12V	1.0V	1.001V	0.999V	0.997V
Buck 2	VCCIO	12V	1.8V	1.799V	1.798V	1.798V
Buck 3	VCCAUX, VCCADC	12V	1.8V	1.801V	1.801V	1.801V
Buck 4	VCCDDR	12V	1.35V	1.354V	1.354V	1.354V

No load

Half Load (1.25A)

Max Load (2.50A)

VIN
VOUT
IOUT

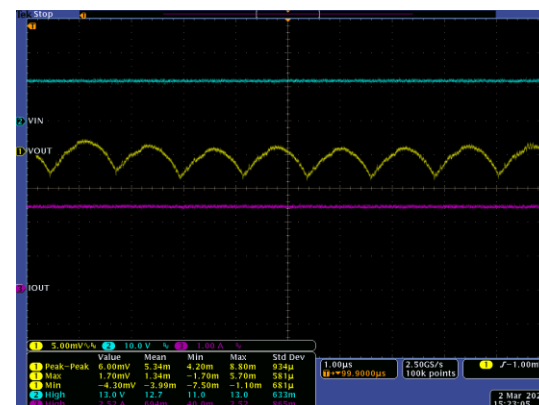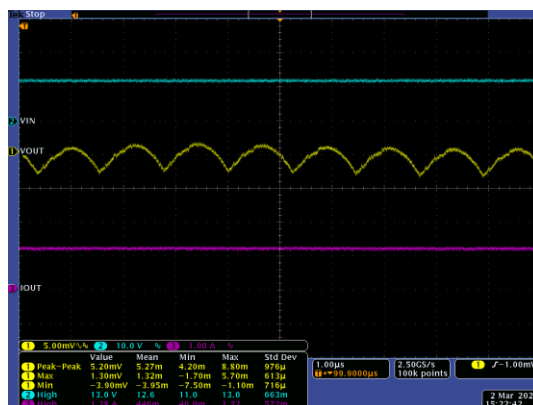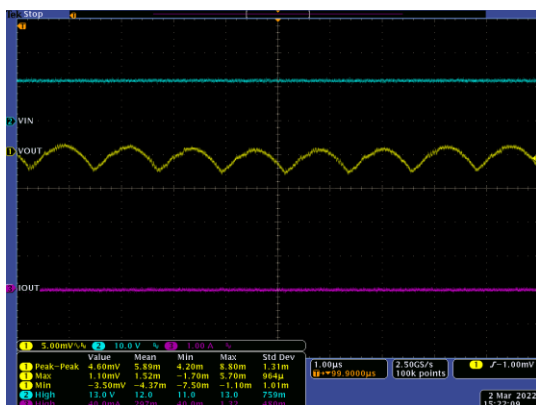

- 4.60 mV peak-peak ripple at No load
- 5.20 mV peak-peak ripple at Half load
- 6.00 mV peak-peak ripple at Max load




Buck 2 - 12Vin - Steady State Ripple

No load

Half Load (0.50A)

Max Load (1.00A)

VIN
VOUT
IOUT

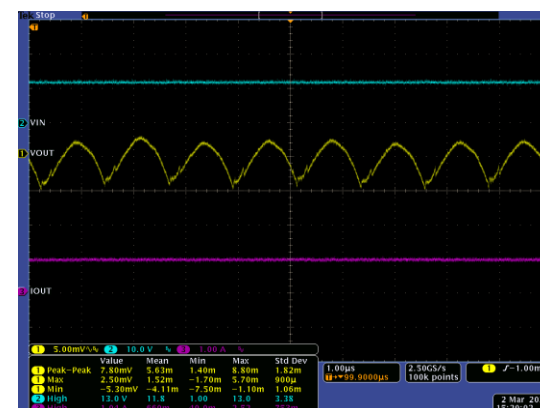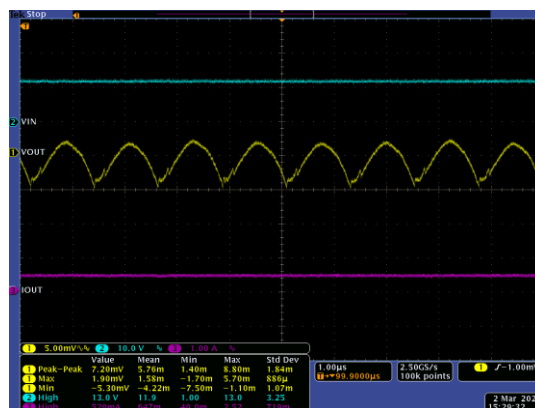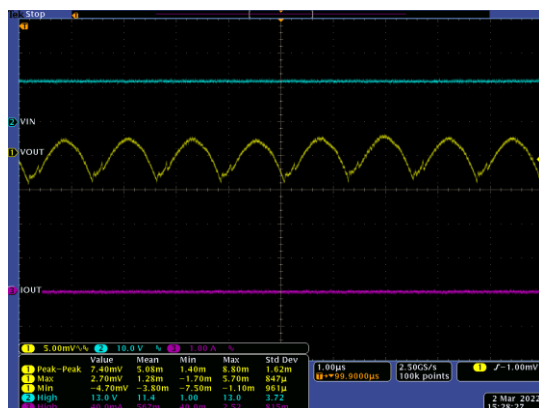

- 7.40 mV peak-peak ripple at No load
- 7.20 mV peak-peak ripple at Half load
- 7.80 mV peak-peak ripple at Max load

No load




Half Load (0.25A)

Max Load (0.50A)

VIN

VOUT

IOUT

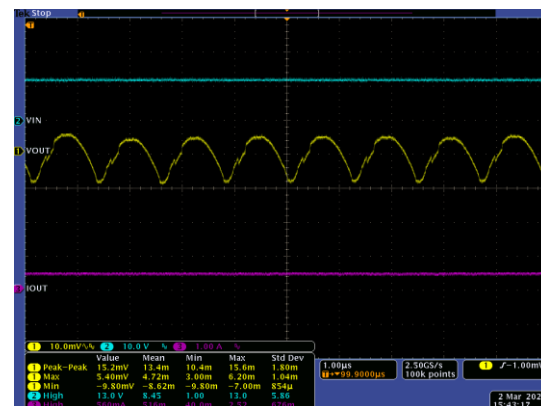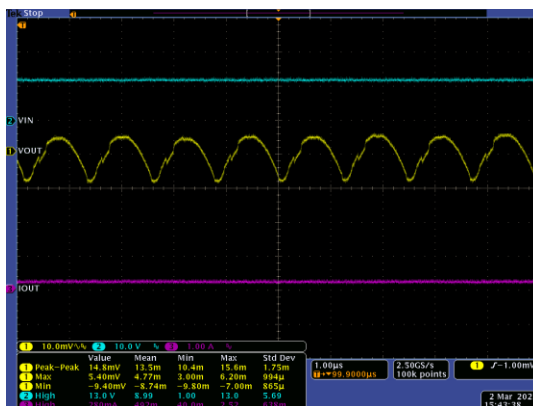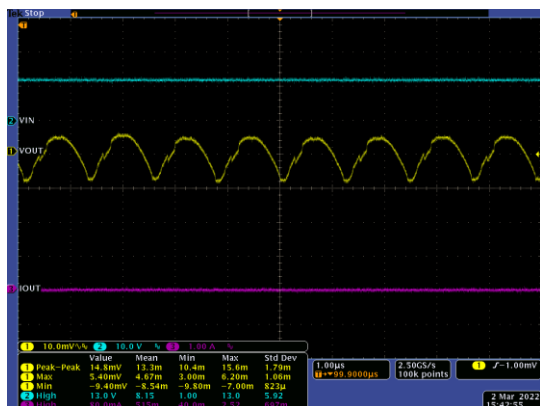

- 14.8 mV peak-peak ripple at No load
- 14.8 mV peak-peak ripple at Half load
- 15.2 mV peak-peak ripple at Max load






Buck 4 - 12Vin - Steady State Ripple

No load

Half Load (1.00A)

Max Load (2.00A)

VIN
VOUT
IOUT

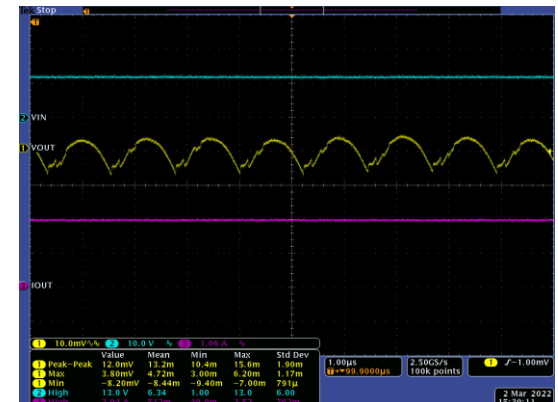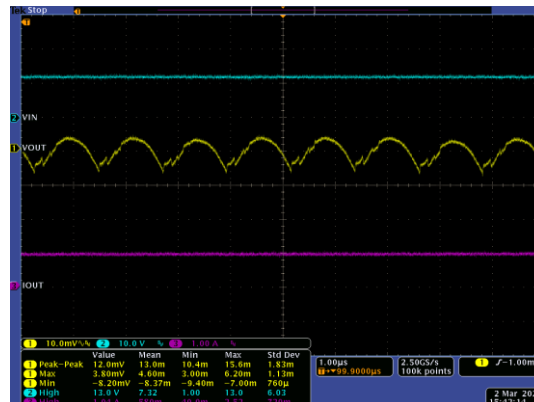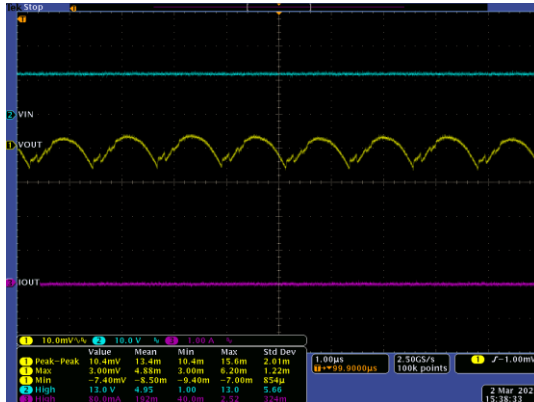

- 10.4 mV peak-peak ripple at No load
- 12.0 mV peak-peak ripple at Half load
- 12.0 mV peak-peak ripple at Max load




Buck 1 - 12Vin -Transient test

Step Load 1.25A→1.88A→1.25A, 10A/us




Rising Edge

VIN
VOUT
IOUT
SW

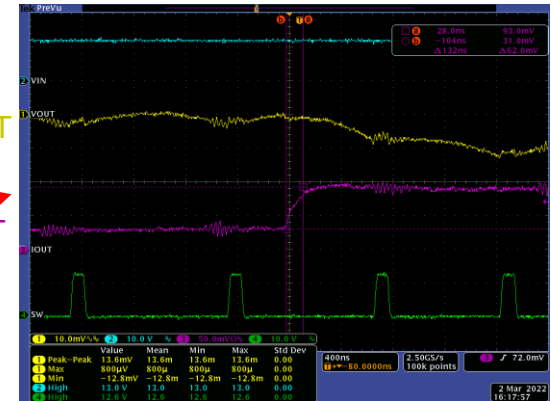

Falling Edge


VIN
VOUT
IOUT
SW

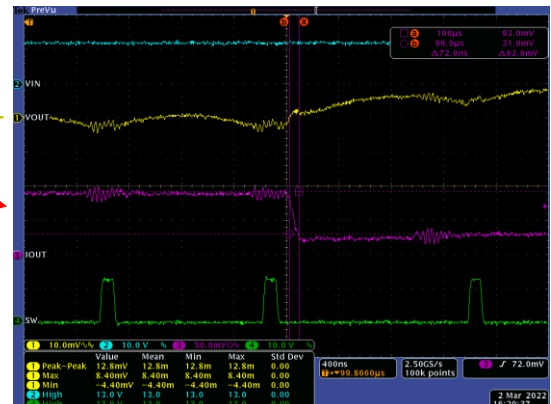

➤ Vout ripple -1.28% (-12.8mV) to +0.88% (8.80mV) with load transient


Step Load 0.50A→0.75A→0.50A, 10A/us

VIN
VOUT
IOUT
SW

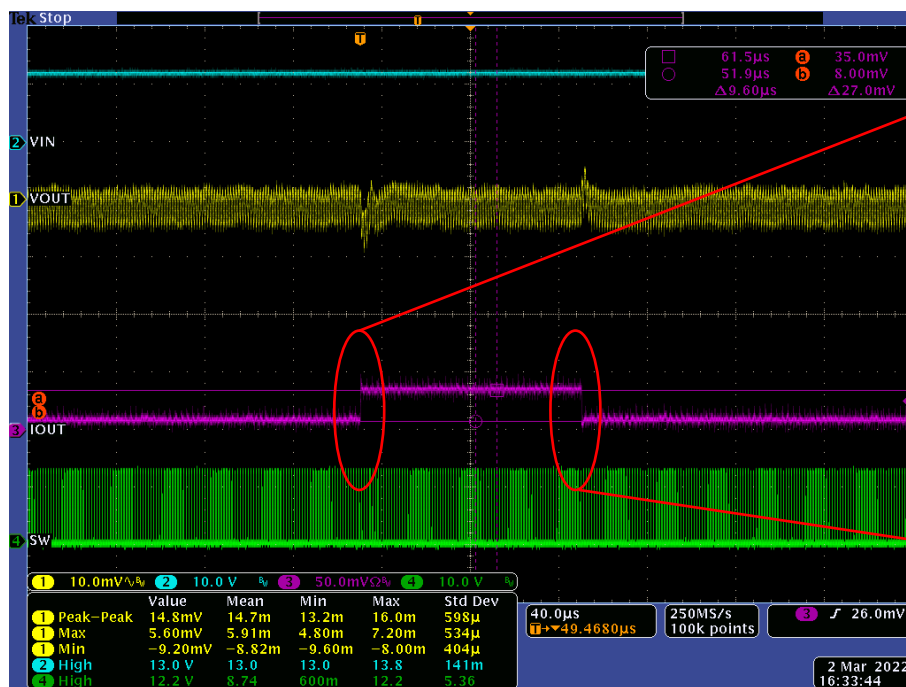


Rising Edge

VIN
VOUT
IOUT
SW

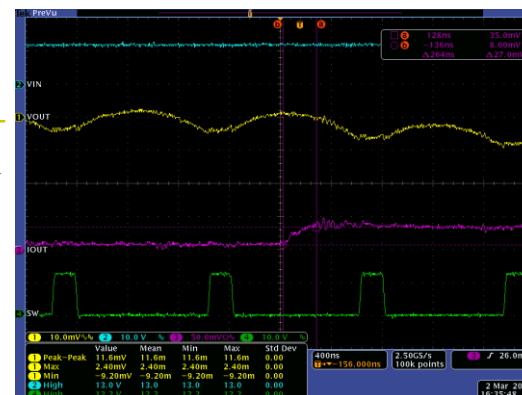


Falling Edge

VIN
VOUT
IOUT
SW

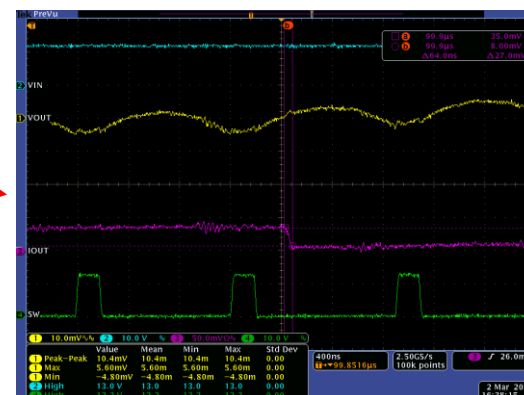


➤ Vout ripple -0.51% (-9.20mV) to +0.31% (5.60mV) with load transient


Step Load 0.25A→0.75A→0.25A, 10A/us

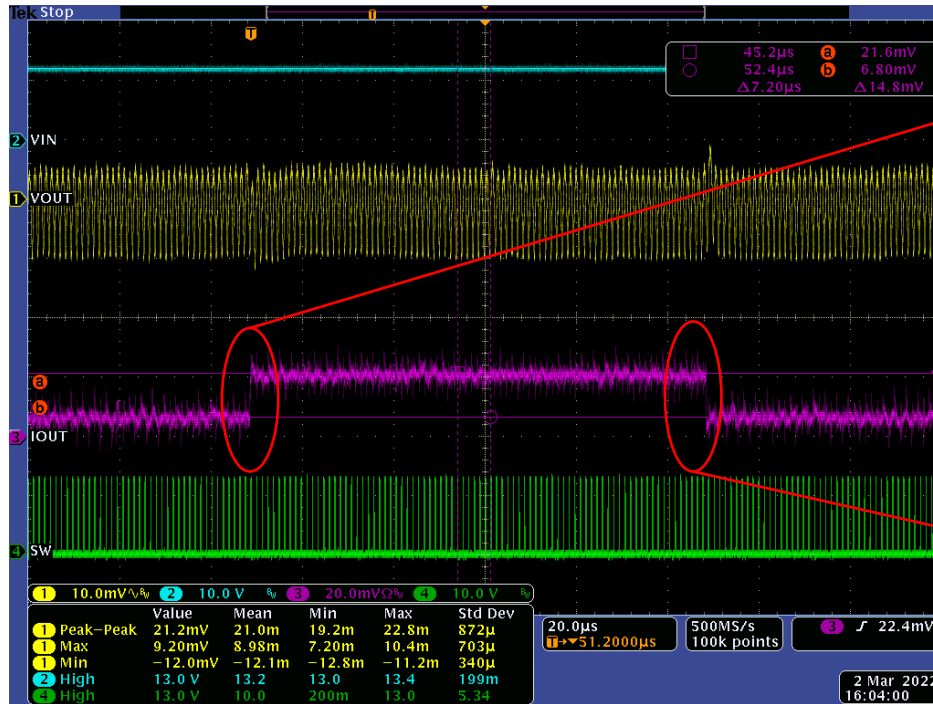

Rising Edge

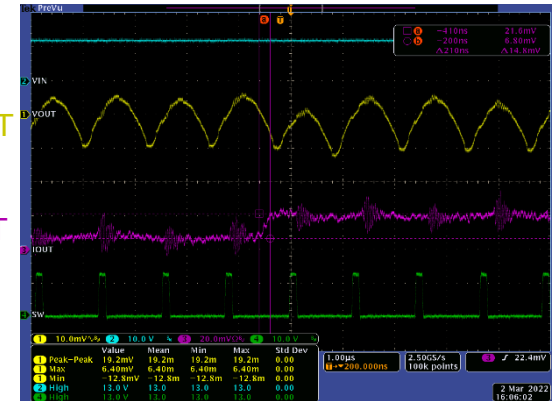


Falling Edge

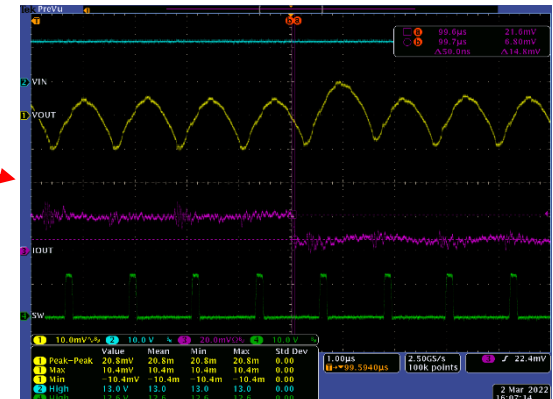


➤ Vout ripple -0.67% (-12.0mV) to +0.51% (9.20mV) with load transient


Step Load 1.00A→1.50A→1.00A, 10A/us

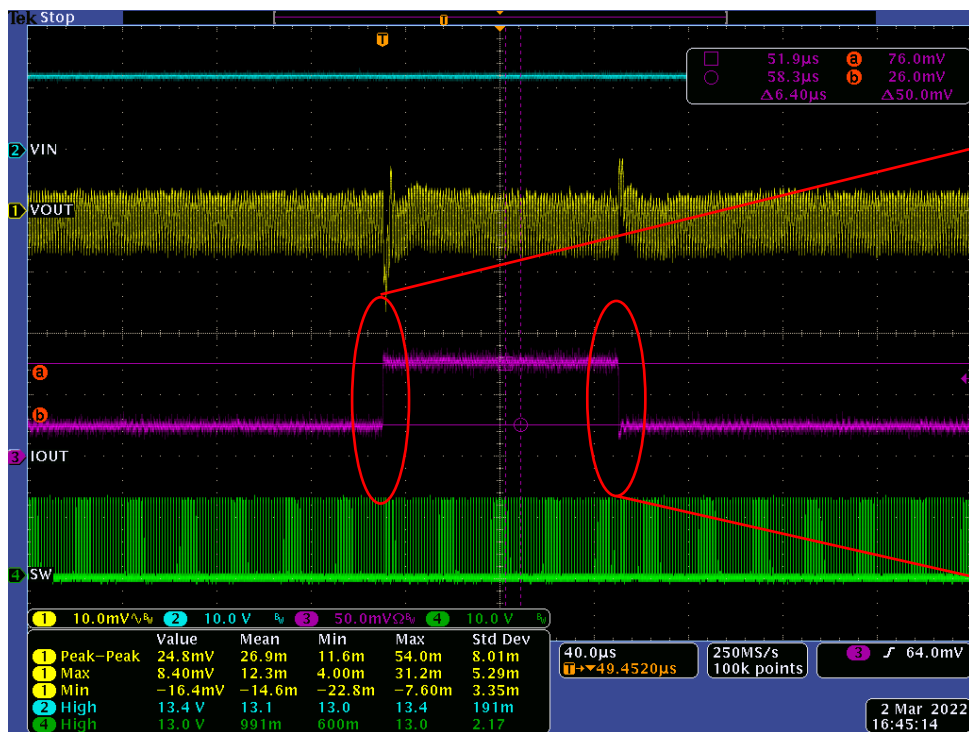

Rising Edge

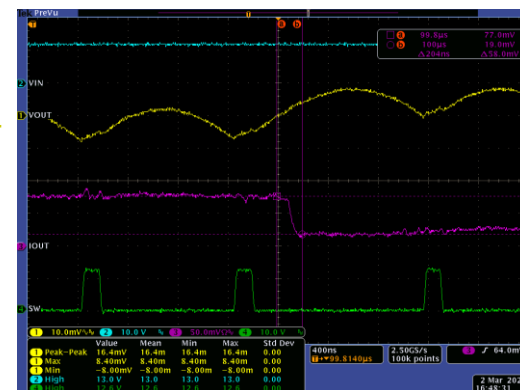

Falling Edge

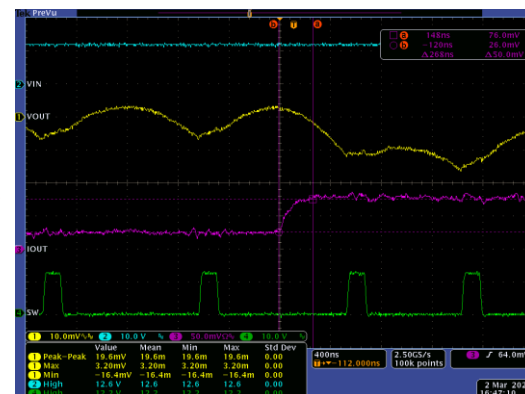

➤ Vout ripple -1.21% (-16.4mV) to +0.62% (8.40mV) with load transient

